




Dose programming

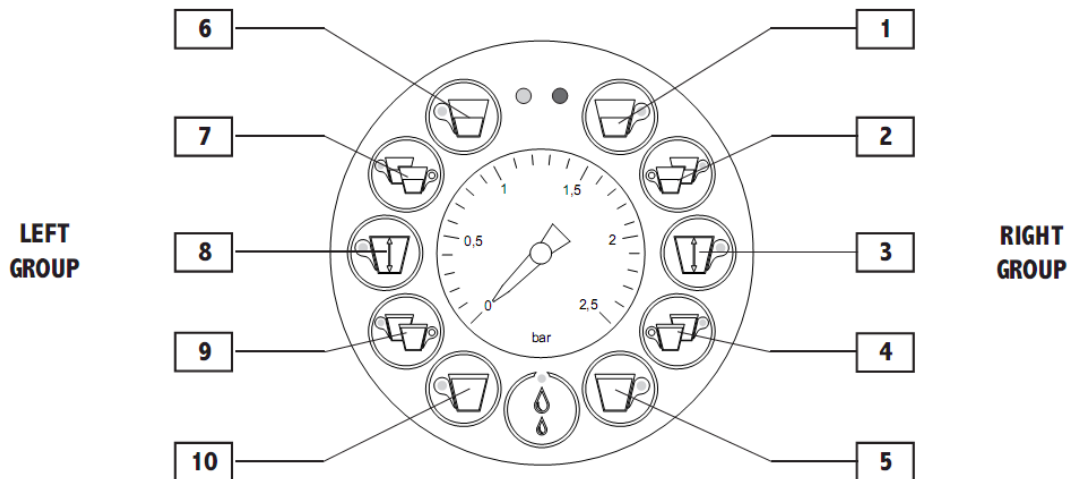

Please note buttons 3 and 8 are on/off only and are not programmable. To exit programming, wait 30 seconds.

Programming the Left group (buttons 6 7 9 and 10)

1. Hold button **(8)** down for at least 5 seconds. The LEDs of the left group selections will light.
2. Insert a coffee pod in the desired handle and attach it to the left group. Tighten and place a coffee cup under the dispensing spout.
3. Press the dose button to be programmed, its LED will come on and coffee will be dispensed.
4. Upon reaching the desired serving, press the dose button again to stop dispensing. This has now set this dose for this button.
5. The LED of the programmed dose will now remain off while the LEDs of the buttons yet to be programmed will remain lit
6. Repeat this operation for the other left group dose buttons as needed.



LB4100 Service Information



SERVICE INFORMATION NO: 003

DATE OF ISSUE: 03/08/2010

Programming the Right group (buttons 6 7 9 and 10)

1. Hold button **(3)** down for at least 5 seconds. The LEDs of the right group selections will light.
2. Insert a coffee pod in the desired handle and attach it to the right group. Tighten and place a coffee cup under the dispensing spout.
3. Press the dose button to be programmed, its LED will come on and coffee will be dispensed.
4. Upon reaching the desired serving, press the dose button again to stop dispensing. This has now set this dose for this button.
5. The LED of the programmed dose will now remain off while the LEDs of the buttons yet to be programmed will remain lit
6. Repeat this operation for the other right group dose buttons as needed.

Programming the Hot Water Dose

1. Hold button **(3)** down for at least 5 seconds. The LEDs of the right group selections will light.
2. Place your desired sized cup under the hot water dispensing nozzle.
3. Press the hot water dispensing button.
4. Upon reaching the desired serving, confirm by pressing the hot water button again.
5. Wait 30 seconds for the machine to exit programming mode.

